



PNOZ s4

Safety relays




pilz

This document is a translation of the original document.

All rights to this documentation are reserved by Pilz GmbH & Co. KG. Copies may be made for internal purposes. Suggestions and comments for improving this documentation will be gratefully received.

Pilz®, PIT®, PMI®, PNOZ®, Primo®, PSEN®, PSS®, PVIS®, SafetyBUS p®, SafetyEYE®, SafetyNET p®, the spirit of safety® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries.

 SD means Secure Digital

Introduction	4
Validity of documentation	4
Retaining the documentation	4
Definition of symbols	4
PNOZ s4 safety relay	5
For your safety	5
Unit features	5
Safety features	6
Block diagram/terminal configuration	6
Function description	7
Installation	7
Wiring	8
Preparing for operation	8
Operating modes	8
Set operating modes	8
Connection	9
Operation	11
Status indicators	11
Error indicators	11
Faults - malfunctions	13
Service life graph	13
Technical details	15
Safety characteristic data	25
Order reference	26
EC declaration of conformity	26

Introduction

Validity of documentation

This documentation is valid for the product PNOZ s4. It is valid until new documentation is published.

This operating manual explains the function and operation, describes the installation and provides guidelines on how to connect the product.

Retaining the documentation

This documentation is intended for instruction and should be retained for future reference.

Definition of symbols

Information that is particularly important is identified as follows:



DANGER!

This warning must be heeded! It warns of a hazardous situation that poses an immediate threat of serious injury and death and indicates preventive measures that can be taken.



WARNING!

This warning must be heeded! It warns of a hazardous situation that could lead to serious injury and death and indicates preventive measures that can be taken.



CAUTION!

This refers to a hazard that can lead to a less serious or minor injury plus material damage, and also provides information on preventive measures that can be taken.



NOTICE

This describes a situation in which the product or devices could be damaged and also provides information on preventive measures that can be taken. It also highlights areas within the text that are of particular importance.

**INFORMATION**

This gives advice on applications and provides information on special features.

PNOZ s4 safety relay

The safety relay provides a safety-related interruption of a safety circuit.

The safety relay meets the requirements of EN 60947-5-1, EN 60204-1 and VDE 0113-1 and may be used in applications with

- ▶ E-STOP pushbuttons
- ▶ Safety gates
- ▶ Light beam devices

Units with the following order numbers can be used as a safety component for lifts in accordance with Annex IV of the directive 95/16/EC and EN 81-1:

- ▶ 750 104
- ▶ 751 104
- ▶ 750 134
- ▶ 751 134

For your safety

- ▶ Only install and commission the unit if you have read and understood these operating instructions and are familiar with the applicable regulations for health and safety at work and accident prevention.
Ensure VDE and local regulations are met, especially those relating to safety.
- ▶ Any guarantee is rendered invalid if the housing is opened or unauthorised modifications are carried out.
- ▶ With railway applications in accordance with EN 50155: The unit may only be accessible for maintenance and repair and not during operation.

Unit features

- ▶ Positive-guided relay outputs:
 - 3 safety contacts (N/O), instantaneous
 - 1 auxiliary contact (N/C), instantaneous
- ▶ 1 semiconductor output
- ▶ Connection options for:
 - E-STOP pushbutton
 - Safety gate limit switch
 - Start button
 - Light beam device
 - PSEN

- ▶ A connector can be used to connect 1 PNOZsigma contact expansion module
- ▶ Operating modes can be set via rotary switch
- ▶ LED indicator for:
 - Supply voltage
 - Input status, channel 1
 - Input status, channel 2
 - Switch status of the safety contacts
 - Start circuit
 - Errors
- ▶ Plug-in connection terminals (either spring-loaded terminal or screw terminal)

Safety features

The relay meets the following safety requirements:

- ▶ The circuit is redundant with built-in self-monitoring.
- ▶ The safety function remains effective in the case of a component failure.
- ▶ The correct opening and closing of the safety function relays is tested automatically in each on-off cycle.
- ▶ The unit has an electronic fuse.

Block diagram/terminal configuration

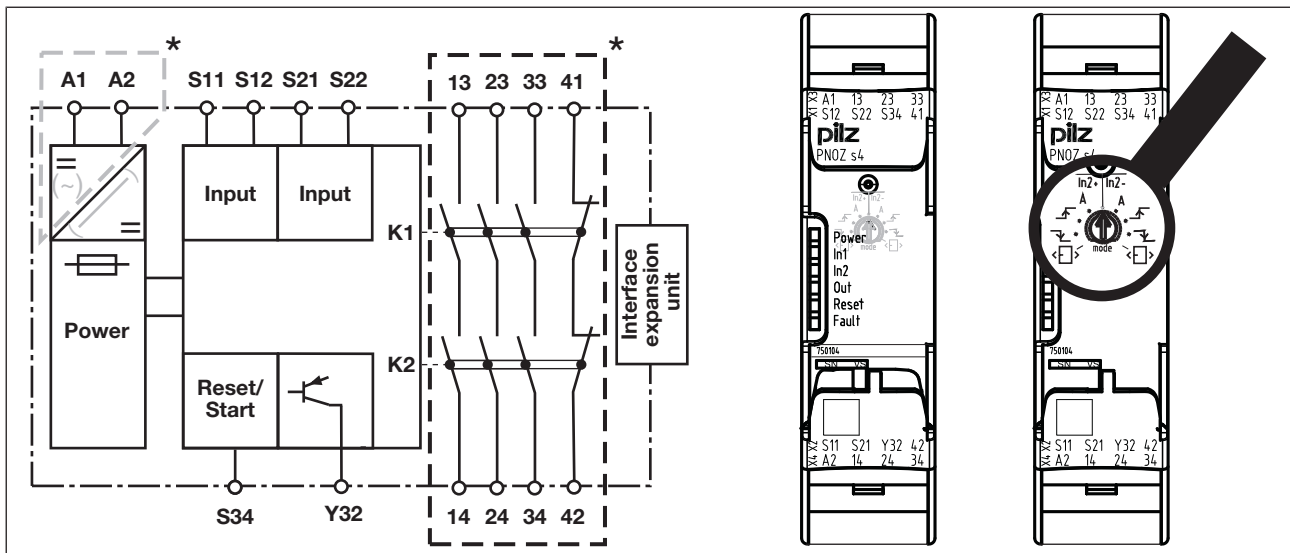


Fig.: Rotary cam arrangement monitoring Front view with cover, right: Front view without cover

Grey highlighted area: Applies only with $U_B = 48 - 240 \text{ V AC/DC}$

*Insulation between the non-marked area and the relay contacts: Basic insulation (over-voltage category III), Protective separation (overvoltage category II)

Function description

- ▶ $\overline{\text{In2}}$ Single-channel operation: no redundancy in the input circuit, earth faults in the start circuit and input circuit are detected.
- ▶ Dual-channel operation without detection of shorts across contacts: redundant input circuit, detects
 - earth faults in the start and input circuit,
 - short circuits in the input circuit and, with a monitored start, in the start circuit too.
- ▶ $\overline{\text{In2}}$ Dual-channel operation with detection of shorts across contacts: redundant input circuit, detects
 - earth faults in the start and input circuit,
 - short circuits in the input circuit and, with a monitored start, in the start circuit too,
 - shorts between contacts in the input circuit.
- ▶ **A** Automatic start: Unit is active once the input circuit has been closed.
- ▶ Manual start: Unit is active once the input circuit is closed and then the start circuit is closed.
- ▶ $\overline{\downarrow}$ Monitored start with falling edge: Unit is active once
 - the input circuit is closed and then the start circuit is closed and opened again.
 - the start circuit is closed and then opened again once the input circuit is closed.
- ▶ \uparrow Monitored start with rising edge: Unit is active once the input circuit is closed and once the start circuit is closed after the waiting period has elapsed (see technical details).
- ▶ \square Start with start-up test: The unit checks whether safety gates that are closed are opened and then closed again when supply voltage is applied.
- ▶ Increase in the number of available instantaneous safety contacts by connecting contact expander modules or external contactors/relays;
A connector can be used to connect 1 PNOZsigma contact expander module.

Installation

Install base unit without contact expansion module:

- ▶ Ensure that the plug terminator is inserted at the side of the unit.

Connect base unit and PNOZsigma contact expansion module:

- ▶ Remove the plug terminator at the side of the base unit and at the contact expansion module.
- ▶ Connect the base unit and the contact expansion module to the supplied connector before mounting the units to the DIN rail.

Installation in control cabinet

- ▶ The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- ▶ Use the notch on the rear of the unit to attach it to a DIN rail (35 mm).
- ▶ When installed vertically: Secure the unit by using a fixing element (e.g. retaining bracket or end angle).

- ▶ Push the device upwards or downwards before lifting it from the DIN rail.

Wiring

Please note:

- ▶ Information given in the "Technical details" must be followed.
- ▶ Outputs 13-14, 23-24, 33-34 are safety contacts; output 41-42 is an auxiliary contact (e.g. for display).
- ▶ Auxiliary contact 41-42 and semiconductor output Y32 should **not** be used for safety circuits!
- ▶ To prevent contact welding, a fuse should be connected before the output contacts (see technical details).
- ▶ Calculation of the max. cable length l_{\max} in the input circuit:

$$l_{\max} = \frac{R_{l_{\max}}}{R_l / \text{km}}$$

$R_{l_{\max}}$ = max. overall cable resistance (see technical details)

R_l / km = cable resistance/km

- ▶ Use copper wire that can withstand 60/75 °C.
- ▶ Sufficient fuse protection must be provided on all output contacts with capacitive and inductive loads.
- ▶ With U_B 48 – 240 VAC/DC: Connect S21 to the protective earth system
- ▶ When connecting magnetically operated, reed proximity switches, ensure that the max. peak inrush current (on the input circuit) does not overload the proximity switch.

Preparing for operation

Operating modes

The operating mode is set via the rotary switch on the unit. You can do this by opening the cover on the front of the unit.



NOTICE

Do not adjust the rotary switch during operation, otherwise an error message will appear, the safety contacts will open and the unit will not be ready for operation until the supply voltage has been switched off and then on again.

Set operating modes

- ▶ Switch off supply voltage.
- ▶ Select operating mode via the operating mode selector switch "mode".
- ▶ If the operating mode selector switch "mode" is in its start position (vertical position), an error message will appear.

Operating mode selector switch "mode"	Automatic/manual start	Monitored start rising edge	Monitored start falling edge	Automatic start with start-up test
Without detection of shorts across contacts				
With detection of shorts across contacts				


Connection

▶ Supply voltage

Supply voltage	AC	DC

▶ Input circuit

Input circuit	Single-channel	Dual-channel
E-STOP without detection of shorts across contacts		
E-STOP with detection of shorts across contacts		
Safety gate without detection of shorts across contacts		
Safety gate with detection of shorts across contacts		

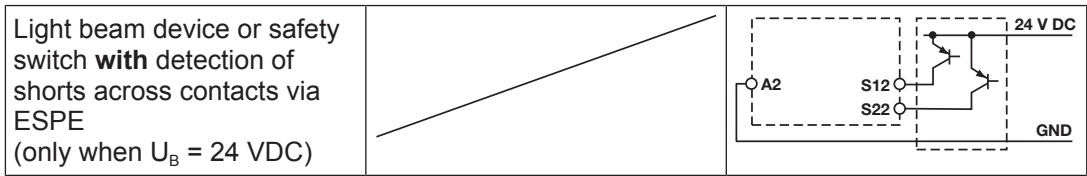

NOTICE

When used as a safety component in accordance with EN 81-1:

- The switch that is used must be designed as a safety switch in accordance with 14.1.2.2 of EN 81-1, so that a failure to open when energised is excluded.
- The supply lines to the safety switch must be laid in accordance with 13.5 of EN 81-1 so that short circuits that would bridge the contacts in the switch can be excluded.

▶ Reset circuit/feedback loop

Reset circuit/feedback loop	Reset circuit	Feedback loop
Automatic reset		
Manual/monitored reset		

▶ Semiconductor output

U_B 24 VDC	U_B 48 - 240 VAC/DC
<p>*Connect together the 0V connections on all the external power supplies</p>	



Legend

- ▶ S1/S2: E-STOP/safety gate switch
- ▶ S3: Start button
- ▶ ↑: Switch operated
- ▶ : Gate open
- ▶ : Gate closed

Operation

The unit is ready for operation when the Power LED is permanently lit.

LEDs indicate the status and errors during operation:






-  LED on
-  LED flashes



INFORMATION

Status indicators and error indicators may occur independently. In the case of an error display, the "Fault" LED will light or flash (exception: "Supply voltage too low"). An LED that is also flashing indicates the potential cause of the error. An LED that is lit and is static indicates a normal operating status. Several status indicators and error indicators may occur simultaneously.

Status indicators

-  **Power**
Supply voltage is present.
-  **In1**
Input circuit at S12 is closed.
-  **In2**
Input circuit at S22 is closed.
-  **Out**
Safety contacts are closed and semiconductor output Y32 carries a high signal.
-  **Reset**
24 V DC is present at S34.

Error indicators

All LEDs off

Diagnostics: Short across contacts/earth fault; unit switched off

- ▶ Remedy: Rectify short across contacts/earth fault, switch off supply voltage for 1 min.



Fault

Diagnostics: Plug terminator not connected

- ▶ Remedy: Insert plug terminator, switch supply voltage off and then on again.

**Fault**

Diagnostics: Internal error, unit defective

- ▶ Remedy: Switch supply voltage off and then on again, change unit if necessary.

**Power**

Diagnostics: Supply voltage too low

- ▶ Remedy: Check the supply voltage.

**In1, In2 alternately****Fault**

Diagnostics: Short detected between S12 and S22

- ▶ Remedy: Rectify short across contacts, switch supply voltage off and then on again.

**In1****Fault**

Diagnostics: Power-up blocked due to short-term interruption at S12; input circuits not operated simultaneously

- ▶ Remedy: Open both input circuits, S12 and S22, simultaneously and then close again.

**In2****Fault**

Diagnostics: Power-up blocked due to short-term interruption at S22; input circuits not operated simultaneously

- ▶ Remedy: Open both input circuits, S12 and S22, simultaneously and then close again.

**Reset****Fault**

Diagnostics: Position of rotary switch is not permitted or rotary switch was adjusted during operation.

- ▶ Remedy: Switch supply voltage off and then on again.



Power, In1, In2, Out, Reset, Fault

Diagnostics: The operating mode selector switch "mode" is in its start position (vertical position)

- ▶ Remedy: Switch off the supply voltage and set the required operating mode on operating mode selector switch "mode".


Faults - malfunctions

- ▶ Contact malfunctions: If the contacts have welded, reactivation will not be possible after the input circuit has opened.

Service life graph

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The wear is mainly caused by the electrical load; the mechanical load is negligible.

U_B 24 VDC

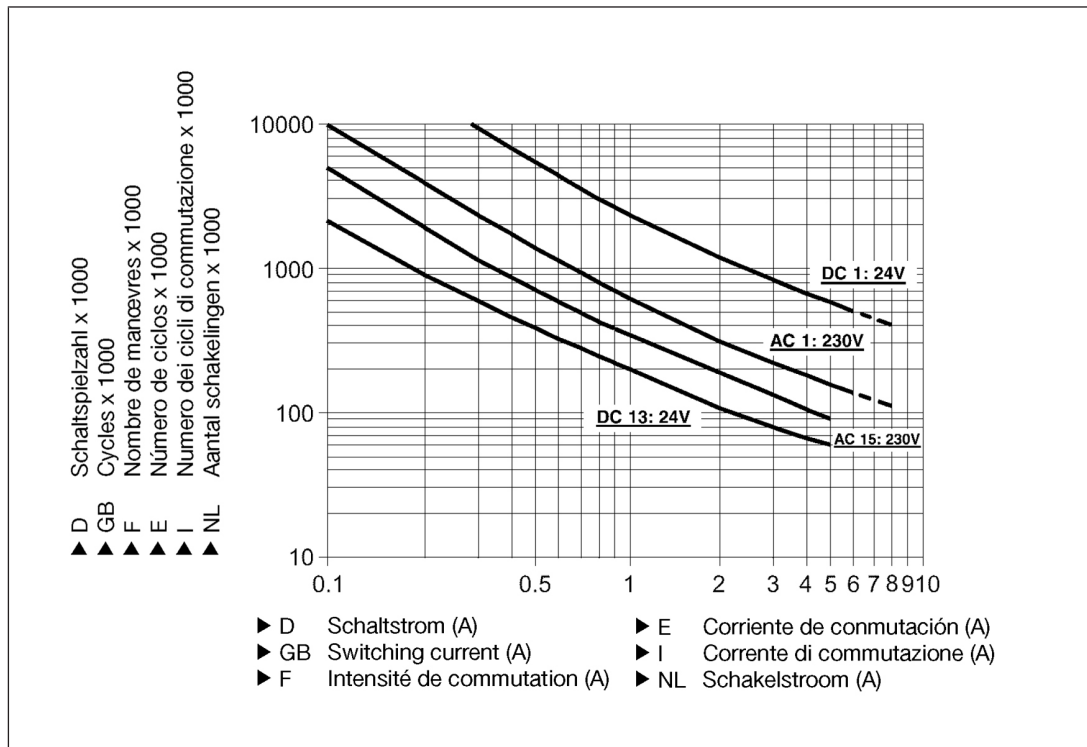


Example

- ▶ Inductive load: 0,2 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 2,000,000 cycles

Provided the application requires fewer than 2,000,000 cycles, the PFH value (see technical details) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With contactors, use freewheel diodes for spark suppression.

U_B 48-240 VAC/DC

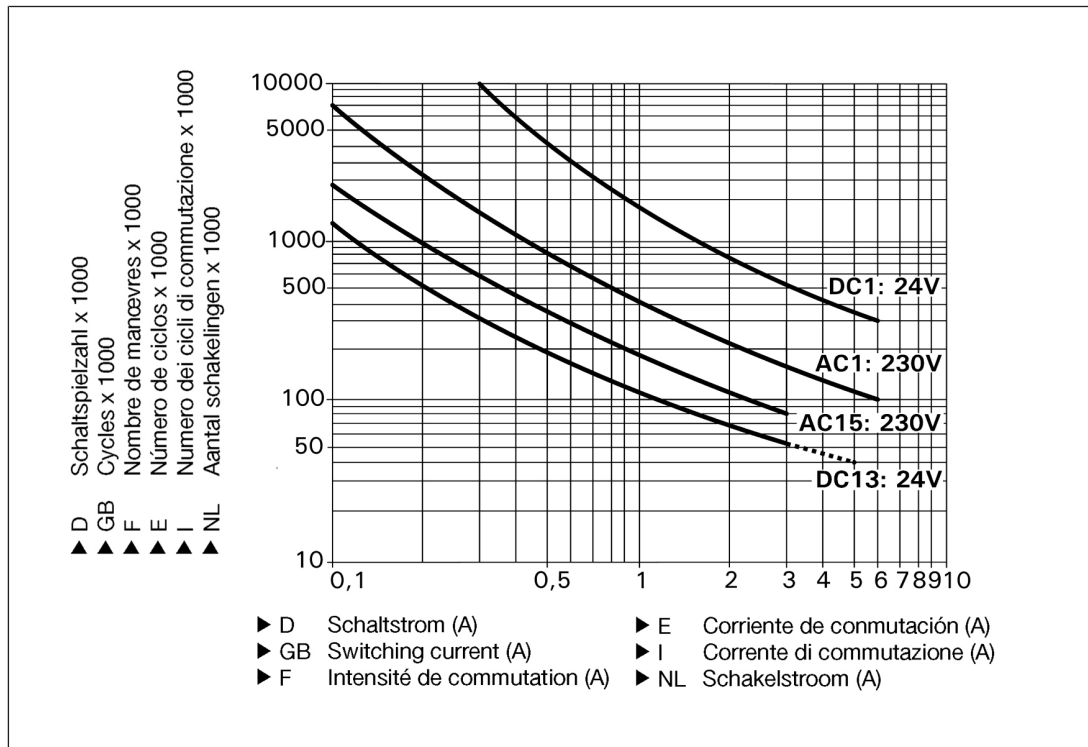

Example

- ▶ Inductive load: 0,2 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 1,000,000 cycles

Provided the application requires fewer than 1,000,000 cycles, the PFH value (see technical details) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With contactors, use freewheel diodes for spark suppression.

Technical details

Order no. 750104 – 751104

See below for more order numbers

General	750104	750134	751104
Approvals	CCC, CE, EAC (Eurasian), KOSHA, TÜV, cULus Listed	CCC, CE, EAC (Eurasian), KOSHA, TÜV, cULus Listed	CCC, CE, EAC (Eurasian), KOSHA, TÜV, cULus Listed
Electrical data	750104	750134	751104
Supply voltage			
Voltage	24 V	48 - 240 V	24 V
Kind	DC	AC/DC	DC
Voltage tolerance	-15 %/+10 %	-15 %/+10 %	-15 %/+10 %
Output of external power supply (AC)	–	5,0 VA	–
Output of external power supply (DC)	2,5 W	2,5 W	2,5 W
Frequency range AC	–	50 - 60 Hz	–
Residual ripple DC	20 %	160 %	20 %
Continuous duty	100 %	100 %	100 %
Max. inrush current impulse			
Current pulse, A1	0,50 A	–	0,50 A
Pulse duration, A1	5,0000 ms	–	5,0000 ms
Current pulse, input circuit	0,20 A	0,20 A	0,20 A
Pulse duration, input circuit	100,0 ms	100,0 ms	100,0 ms
Current pulse, feedback loop	0,20 A	0,20 A	0,20 A
Pulse duration, feedback loop	15,0 ms	15,0 ms	15,0 ms
Current pulse, start circuit	0,20 A	0,20 A	0,20 A
Pulse duration, start circuit	15,0 ms	15,0 ms	15,0 ms

Electrical data	750104	750134	751104
Max. overall cable resistance R _{lmax}			
Single-channel at UB DC	30 Ohm	30 Ohm	30 Ohm
Single-channel at UB AC	–	30 Ohm	–
Dual-channel without detection of shorts across contacts at UB DC	60 Ohm	30 Ohm	60 Ohm
Dual-channel without detection of shorts across contacts at UB AC	–	30 Ohm	–
Dual-channel with detection of shorts across contacts at UB DC	30 Ohm	30 Ohm	30 Ohm
Dual-channel with detection of shorts across contacts at UB AC	–	30 Ohm	–
Min. input resistance at power-on	110 Ohm	110 Ohm	110 Ohm
Voltage at			
Input circuit DC	24,0 V	24,0 V	24,0 V
Start circuit DC	24,0 V	24,0 V	24,0 V
Feedback loop DC	24,0 V	24,0 V	24,0 V
Current at			
Input circuit DC	50,0 mA	50,0 mA	50,0 mA
Start circuit DC	50,0 mA	50,0 mA	50,0 mA
Feedback loop	50,0 mA	50,0 mA	50,0 mA
Number of output contacts			
Safety contacts (N/O), instantaneous	3	3	3
Auxiliary contacts (N/C)	1	1	1
Inputs	750104	750134	751104
Number	2	2	2
Semiconductor outputs	750104	750134	751104
Number	1	1	1
Voltage	24,0 V	24,0 V	24,0 V
Current	20 mA	20 mA	20 mA
Relay outputs	750104	750134	751104
Max. short circuit current I _K	1 kA	1 kA	1 kA

Relay outputs	750104	750134	751104
Utilisation category			
In accordance with the standard	EN 60947-4-1	EN 60947-4-1	EN 60947-4-1
Auxiliary contacts, AC1 at	240 V	240 V	240 V
Min. current	0,01 A	0,01 A	0,01 A
Max. current	6,0 A	6,0 A	6,0 A
Max. power	1500 VA	1500 VA	1500 VA
Auxiliary contacts, DC1 at	24 V	24 V	24 V
Min. current	0,01 A	0,01 A	0,01 A
Max. current	6,0 A	6,0 A	6,0 A
Max. power	150 W	150 W	150 W
Safety contacts, AC1 at	240 V	240 V	240 V
Max. current	6,0 A	6,0 A	6,0 A
Min. current	0,01 A	0,01 A	0,01 A
Max. power	1500 VA	1500 VA	1500 VA
Safety contacts, DC 1 at	24 V	24 V	24 V
Max. current	6,0 A	6,0 A	6,0 A
Min. current	0,01 A	0,01 A	0,01 A
Max. power	150 W	150 W	150 W
Utilisation category			
In accordance with the standard	EN 60947-5-1	EN 60947-5-1	EN 60947-5-1
Auxiliary contacts AC15 at	230 V	230 V	230 V
Max. current	5,0 A	3,0 A	5,0 A
Auxiliary contacts, DC13 (6 cycles/min) at	24 V	24 V	24 V
Max. current	5,0 A	4,0 A	5,0 A
Safety contacts, AC15 at	230 V	230 V	230 V
Max. current	5,0 A	3,0 A	5,0 A
Safety contacts DC13 (6 cycles/min) at	24 V	24 V	24 V
Max. current	5,0 A	4,0 A	5,0 A
Contact fuse protection external, safety contacts			
In accordance with the standard	EN 60947-5-1	EN 60947-5-1	EN 60947-5-1
Blow-out fuse, quick	10 A	6 A	10 A
Blow-out fuse, slow	6,00 A	4,00 A	6,00 A
Circuit breaker, 24V AC/DC, characteristic B/C	6 A	4 A	6 A

Relay outputs	750104	750134	751104
Contact fuse protection external, auxiliary contacts			
Blow-out fuse, quick	10 A	6 A	10 A
Blow-out fuse, slow	6 A	4 A	6 A
Circuit breaker, 24 V AC/DC, characteristic B/C	6 A	4 A	6 A
Contact material	AgCuNi + 0,2 µm Au	AgCuNi + 0,2 µm Au	AgCuNi + 0,2 µm Au
Conventional thermal current while loading several contacts	750104	750134	751104
Ith per contact at UB AC			
Conv. therm. current with 1 contact	–	6,00 A	–
Conv. therm. current with 2 contacts	–	6,00 A	–
Conv. therm. current with 3 contacts	–	4,50 A	–
Ith per contact at UB DC			
Conv. therm. current with 1 contact	6,00 A	6,00 A	6,00 A
Conv. therm. current with 2 contacts	6,00 A	6,00 A	6,00 A
Conv. therm. current with 3 contacts	5,00 A	4,50 A	5,00 A
Times	750104	750134	751104
Switch-on delay			
With automatic start typ.	170 ms	170 ms	170 ms
With automatic start max.	300 ms	300 ms	300 ms
With automatic start after power on typ.	350 ms	350 ms	350 ms
With automatic start after power on max.	600 ms	600 ms	600 ms
With manual start typ.	40 ms	40 ms	40 ms
With monitored start with rising edge typ.	35 ms	35 ms	35 ms
With monitored start with rising edge max.	50 ms	50 ms	50 ms
With monitored start with falling edge typ.	55 ms	55 ms	55 ms
With monitored start with falling edge max.	70 ms	70 ms	70 ms

Times	750104	750134	751104
Delay-on de-energisation			
With E-STOP typ.	10 ms	10 ms	10 ms
With E-STOP max.	20 ms	20 ms	20 ms
With power failure typ.	40 ms	40 ms	40 ms
With power failure max.	80 ms	80 ms	80 ms
Recovery time at max. switching frequency 1/s			
After E-STOP	100 ms	50 ms	100 ms
After power failure	100 ms	100 ms	100 ms
Waiting period with a monitored start			
With rising edge	120 ms	120 ms	120 ms
With falling edge	250 ms	150 ms	250 ms
Min. start pulse duration with a monitored start			
With rising edge	30 ms	30 ms	30 ms
With falling edge	100 ms	100 ms	100 ms
Supply interruption before de-energisation	20 ms	20 ms	20 ms
Simultaneity, channel 1 and 2	∞	∞	∞
Environmental data	750104	750134	751104
Climatic suitability	EN 60068-2-78	EN 60068-2-78	EN 60068-2-78
Ambient temperature			
Temperature range	-10 - 55 °C	-10 - 55 °C	-10 - 55 °C
Storage temperature			
Temperature range	-40 - 85 °C	-40 - 85 °C	-40 - 85 °C
Condensation during operation	Not permitted	Not permitted	Not permitted
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4
Vibration			
In accordance with the standard	EN 60068-2-6	EN 60068-2-6	EN 60068-2-6
Frequency	10,0 - 55,0 Hz	10,0 - 55,0 Hz	10,0 - 55,0 Hz
Amplitude	0,35 mm	0,35 mm	0,35 mm
Airgap creepage			
In accordance with the standard	EN 60947-1	EN 60947-1	EN 60947-1
Overvoltage category	III / II	III / II	III / II
Pollution degree	2	2	2
Rated insulation voltage	250 V	250 V	250 V
Rated impulse withstand voltage	4,00 kV	4,00 kV	4,00 kV

Environmental data	750104	750134	751104
Protection type			
Mounting area (e.g. control cabinet)	IP54	IP54	IP54
Housing	IP40	IP40	IP40
Terminals	IP20	IP20	IP20
Mechanical data	750104	750134	751104
Mounting position	Any	Any	Any
Mechanical life	10,000,000 cycles	10,000,000 cycles	10,000,000 cycles
Material			
Bottom	PC	PC	PC
Front	PC	PC	PC
Top	PC	PC	PC
Conductor cross section with screw terminals			
1 core flexible	0,25 - 2,50 mm², 24 - 12 AWG	0,25 - 2,50 mm², 24 - 12 AWG	–
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1,00 mm², 24 - 16 AWG	0,25 - 1,00 mm², 24 - 16 AWG	–
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,20 - 1,50 mm², 24 - 16 AWG	0,20 - 1,50 mm², 24 - 16 AWG	–
Torque setting with screw terminals			
	0,50 Nm	0,50 Nm	–
Connection type			
	Screw terminal	Screw terminal	Spring-loaded terminal
Mounting type			
	plug-in	plug-in	plug-in
Conductor cross section with spring-loaded terminals: Flexible with/without crimp connector			
	–	–	0,20 - 2,50 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection			
	–	–	2
Stripping length			
	–	–	9 mm
Dimensions			
Height	98,0 mm	98,0 mm	100,0 mm
Width	22,5 mm	22,5 mm	22,5 mm
Depth	120,0 mm	120,0 mm	120,0 mm
Weight			
	190 g	210 g	190 g

Order no. 751134 – 751184

General	751134	751184
Approvals	CCC, CE, EAC (Eurasian), KOSHA, TÜV, cULus Listed	CCC, CE, EAC (Eurasian), KOSHA, TÜV, cULus Listed

Electrical data	751134	751184
Supply voltage		
Voltage	48 - 240 V	24 V
Kind	AC/DC	DC
Voltage tolerance	-15 %/+10 %	-15 %/+10 %
Output of external power supply (AC)	5,0 VA	–
Output of external power supply (DC)	2,5 W	2,5 W
Frequency range AC	50 - 60 Hz	–
Residual ripple DC	160 %	20 %
Continuous duty	100 %	100 %
Max. inrush current impulse		
Current pulse, A1	–	0,50 A
Pulse duration, A1	–	5,0000 ms
Current pulse, input circuit	0,20 A	0,20 A
Pulse duration, input circuit	100,0 ms	100,0 ms
Current pulse, feedback loop	0,20 A	0,20 A
Pulse duration, feedback loop	15,0 ms	15,0 ms
Current pulse, start circuit	0,20 A	0,20 A
Pulse duration, start circuit	15,0 ms	15,0 ms
Max. overall cable resistance RI-max		
Single-channel at UB DC	30 Ohm	30 Ohm
Single-channel at UB AC	30 Ohm	–
Dual-channel without detection of shorts across contacts at UB DC	30 Ohm	60 Ohm
Dual-channel without detection of shorts across contacts at UB AC	30 Ohm	–
Dual-channel with detection of shorts across contacts at UB DC	30 Ohm	30 Ohm
Dual-channel with detection of shorts across contacts at UB AC	30 Ohm	–
Min. input resistance at power-on	110 Ohm	110 Ohm
Voltage at		
Input circuit DC	24,0 V	24,0 V
Start circuit DC	24,0 V	24,0 V
Feedback loop DC	24,0 V	24,0 V
Current at		
Input circuit DC	50,0 mA	50,0 mA
Start circuit DC	50,0 mA	50,0 mA
Feedback loop	50,0 mA	50,0 mA
Number of output contacts		
Safety contacts (N/O), instantaneous	3	3
Auxiliary contacts (N/C)	1	1

Inputs	751134	751184
Number	2	2
Semiconductor outputs	751134	751184
Number	1	1
Voltage	24,0 V	24,0 V
Current	20 mA	20 mA
Relay outputs	751134	751184
Max. short circuit current IK	1 kA	1 kA
Utilisation category		
In accordance with the standard	EN 60947-4-1	EN 60947-4-1
Auxiliary contacts, AC1 at	240 V	240 V
Min. current	0,01 A	0,01 A
Max. current	6,0 A	6,0 A
Max. power	1500 VA	1500 VA
Auxiliary contacts, DC1 at	24 V	24 V
Min. current	0,01 A	0,01 A
Max. current	6,0 A	6,0 A
Max. power	150 W	150 W
Safety contacts, AC1 at	240 V	240 V
Max. current	6,0 A	6,0 A
Min. current	0,01 A	0,01 A
Max. power	1500 VA	1500 VA
Safety contacts, DC 1 at	24 V	24 V
Max. current	6,0 A	6,0 A
Min. current	0,01 A	0,01 A
Max. power	150 W	150 W
Utilisation category		
In accordance with the standard	EN 60947-5-1	EN 60947-5-1
Auxiliary contacts AC15 at	230 V	230 V
Max. current	3,0 A	5,0 A
Auxiliary contacts, DC13 (6 cycles/min) at	24 V	24 V
Max. current	4,0 A	5,0 A
Safety contacts, AC15 at	230 V	230 V
Max. current	3,0 A	5,0 A
Safety contacts DC13 (6 cycles/min) at	24 V	24 V
Max. current	4,0 A	5,0 A
Contact fuse protection external, safety contacts		
In accordance with the standard	EN 60947-5-1	EN 60947-5-1
Blow-out fuse, quick	6 A	10 A
Blow-out fuse, slow	4,00 A	6,00 A
Circuit breaker, 24V AC/DC, characteristic B/C	4 A	6 A

Relay outputs	751134	751184
Contact fuse protection external, auxiliary contacts		
Blow-out fuse, quick	6 A	10 A
Blow-out fuse, slow	4 A	6 A
Circuit breaker, 24 V AC/DC, characteristic B/C	4 A	6 A
Contact material	AgCuNi + 0,2 µm Au	AgCuNi + 0,2 µm Au
Conventional thermal current while loading several contacts	751134	751184
Ith per contact at UB AC		
Conv. therm. current with 1 contact	6,00 A	–
Conv. therm. current with 2 contacts	6,00 A	–
Conv. therm. current with 3 contacts	4,50 A	–
Ith per contact at UB DC		
Conv. therm. current with 1 contact	6,00 A	6,00 A
Conv. therm. current with 2 contacts	6,00 A	6,00 A
Conv. therm. current with 3 contacts	4,50 A	5,00 A
Times	751134	751184
Switch-on delay		
With automatic start typ.	170 ms	170 ms
With automatic start max.	300 ms	300 ms
With automatic start after power on typ.	350 ms	350 ms
With automatic start after power on max.	600 ms	600 ms
With manual start typ.	40 ms	40 ms
With monitored start with rising edge typ.	35 ms	35 ms
With monitored start with rising edge max.	50 ms	50 ms
With monitored start with falling edge typ.	55 ms	55 ms
With monitored start with falling edge max.	70 ms	70 ms
Delay-on de-energisation		
With E-STOP typ.	10 ms	10 ms
With E-STOP max.	20 ms	20 ms
With power failure typ.	40 ms	40 ms
With power failure max.	80 ms	80 ms
Recovery time at max. switching frequency 1/s		
After E-STOP	50 ms	100 ms
After power failure	100 ms	100 ms

Times	751134	751184
Waiting period with a monitored start		
With rising edge	120 ms	120 ms
With falling edge	150 ms	250 ms
Min. start pulse duration with a monitored start		
With rising edge	30 ms	30 ms
With falling edge	100 ms	100 ms
Supply interruption before de-energisation	20 ms	20 ms
Simultaneity, channel 1 and 2	∞	∞
Environmental data	751134	751184
Climatic suitability	EN 60068-2-78	EN 60068-2-78
Ambient temperature		
Temperature range	-10 - 55 °C	-25 - 55 °C
Storage temperature		
Temperature range	-40 - 85 °C	-40 - 85 °C
Condensation during operation	Not permitted	–
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4
Vibration		
In accordance with the standard	EN 60068-2-6	EN 60068-2-6
Frequency	10,0 - 55,0 Hz	10,0 - 55,0 Hz
Amplitude	0,35 mm	0,35 mm
Airgap creepage		
In accordance with the standard	EN 60947-1	EN 60947-1
Overvoltage category	III / II	III / II
Pollution degree	2	2
Rated insulation voltage	250 V	250 V
Rated impulse withstand voltage	4,00 kV	4,00 kV
Protection type		
Mounting area (e.g. control cabinet)	IP54	IP54
Housing	IP40	IP40
Terminals	IP20	IP20
Mechanical data	751134	751184
Mounting position	Any	Any
Mechanical life	10,000,000 cycles	10,000,000 cycles
Material		
Bottom	PC	PC
Front	PC	PC
Top	PC	PC
Connection type	Spring-loaded terminal	Spring-loaded terminal
Mounting type	plug-in	plug-in

Mechanical data	751134	751184
Conductor cross section with spring-loaded terminals: Flexible with/without crimp connector	0,20 - 2,50 mm ² , 24 - 12 AWG	0,20 - 2,50 mm ² , 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2	2
Stripping length	9 mm	9 mm
Dimensions		
Height	100,0 mm	100,0 mm
Width	22,5 mm	22,5 mm
Depth	120,0 mm	120,0 mm
Weight	210 g	190 g

The standards current on 2009-12 apply.

Safety characteristic data

Operating mode	EN ISO 13849-1: 2008	EN ISO 13849-1: 2008	EN IEC 62061 SIL CL	EN IEC 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2008 T _M [year]
Safety contacts, instantaneous	PL e	Cat. 4	SIL CL 3	2,31E-09	SIL 3	2,03E-06	20

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.



CAUTION!

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switching frequency and the load on the relay output. If the service life graphs are not accessible, the stated PFH value can be used irrespective of the switching frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

Order reference

Product type	Features			Terminals	Order no.
PNOZ s4		24 V DC		Screw terminals	750 104
PNOZ s4	48 – 240 V AC/DC			Screw terminals	750 134
PNOZ s4 C		24 V DC		Spring-loaded terminals	751 104
PNOZ s4 C	48 – 240 V AC/DC			Spring-loaded terminals	751 134
PNOZ s4 C Coated		24 V DC		Spring-loaded terminals	751 184

EC declaration of conformity

This product/these products meet the requirements of the directive 2006/42/EC for machinery of the European Parliament and of the Council. The complete EC Declaration of Conformity is available on the Internet at www.pilz.com/downloads.

Representative: Norbert Fröhlich, Pilz GmbH & Co. KG, Felix-Wankel-Str. 2, 73760 Ostfildern, Germany

► Support

Technical support is available from Pilz round the clock.

Americas

Brazil
+55 11 97569-2804
Canada
+1 888-315-PILZ (315-7459)
Mexico
+52 55 5572 1300
USA (toll-free)
+1 877-PILZUSA (745-9872)

Asia

China
+86 21 60880878-216
Japan
+81 45 471-2281
South Korea
+82 31 450 0680

Australia

+61 3 95446300

Europe

Austria
+43 1 7986263-0
Belgium, Luxembourg
+32 9 3217575
France
+33 3 88104000
Germany
+49 711 3409-444
Ireland
+353 21 4804983
Italy
+39 0362 1826711

Scandinavia

+45 74436332

Spain

+34 938497433

Switzerland

+41 62 88979-30

The Netherlands

+31 347 320477

Turkey

+90 216 5775552

United Kingdom

+44 1536 462203

You can reach our international hotline on:

+49 711 3409-444

support@pilz.com

Pilz develops environmentally-friendly products using ecological materials and energy-saving technologies. Offices and production facilities are ecologically designed, environmentally-aware and energy-saving. So Pilz offers sustainability, plus the security of using energy-efficient products and environmentally-friendly solutions.

Energy saving by Pilz



The 4-fold safety of automation

COMPONENTS
SYSTEMS
SERVICES

Technical Ecological
Personal Economical



Pilz GmbH & Co. KG
Felix-Wankel-Straße 2
73760 Ostfildern, Germany
Tel.: +49 711 3409-0
Fax: +49 711 3409-133
info@pilz.com
www.pilz.com

pilz
the spirit of safety

CMSE, InduraNET p, PAS4000, PAScal, PASconfig, Pilz, PIT, PLID, PMCPrimo, PMCProtego, PMCTendo, PMD, PMI, PNOZ, Primo, PSEN, PSS, PVS, Safety SafetyYE, SafetyNET p, the spirit of safety, are registered and protected trademarks of Pilz GmbH & Co. KG in some countries. We would point out that product features may vary from the details stated in this document, depending on the status at the time of publication and the scope of the equipment. We accept no responsibility for the validity, accuracy and entirety of the text and graphics presented in this information. Please contact our Technical Support if you have any questions.